


Mosaic™

Cat. No(s): 2 785 94L

Double USB socket - Type-A - 3.0 A

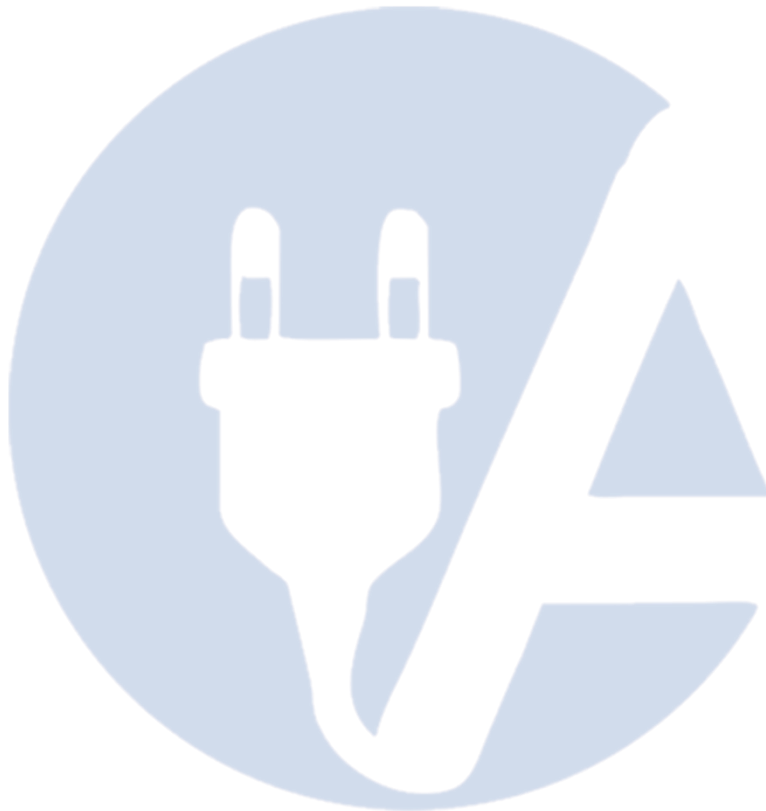


1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks.

2. RANGE

Designation	White
Double USB socket 5 V - 3.0 A	2 785 94L

3. DIMENSIONS (mm)

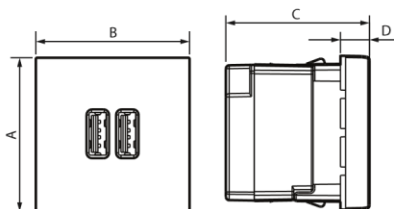

A	B	C	D
45	45	42	8.5

4. CONNECTION

Type of terminals: with screws
Terminal capacity: 2 x 2.5 mm²
Stripping length: 6 mm
Screwdriver: flat 3.5 mm
Circuit breaker: 16 A MAXI

Necessary safety precautions:



**Switch OFF the power at the main circuit breaker.
Make sure that the power is OFF before continuing
with the installation.**

5. TECHNICAL CHARACTERISTICS

■ All values listed below are measured at an ambient temperature of + 20°

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Nominal output voltage	5.0 V
Nominal input current	0.3 A
Maximum output current	3.0 A
Power consumption	15.0 W
Average efficiency in active mode	84.43 %
Stand-by power consumption	< 0.07 W
Protection class	II - Low voltage

*NB: European Regulation No. 278/2009 of 6 April 2009, Directive 2005/125/EC on

■ 5.1 Mechanical characteristics

Impact tests: IK 04
Penetration by solid bodies/liquid: IP 40

■ 5.2 Material characteristics Base:

PC V-0 class
Cover-plate: ABS White RAL 9003 Self-extinguishing:
850°C/30 s for insulating parts holding live parts in place.
650°C/30 s for other parts made of insulating materials.

5.3 Electrical characteristics and after 30 minutes of operation.


Note: To optimize the charging time of your device, ensure turn it off during the charging phase.

5.4 Climate characteristics

Storage temperature: - 20°C to + 70°C

Operating temperature: 0°C to + 40°C

Mosaic™

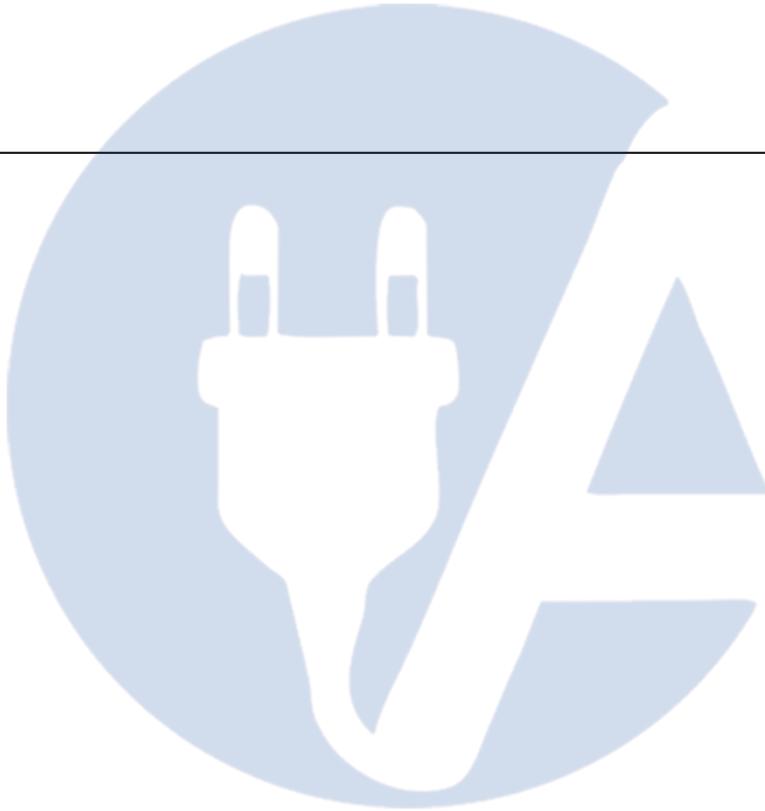

1/2

Cat. No(s): 2 785 94L

Double USB socket - Type-A - 3.0 A

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

Caution: Always test before using other special cleaning products.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e-catalogue.

