

PHILIPS

Lighting



RoadFlair Pro

BRP593 LED242/NW 150W DM PSA P7 GM

RoadFlair Pro, 24200 lm, 150 W, 740 neutral white, depends on driver (1-10V, DALI...), Safety class I

Municipalities value energy saving more than ever, as energy price hikes put increasing pressure on the budgets. Street lighting consumes substantial energy, so large-scale upgrades to energy-efficient LED streetlights are fundamental to cities' cost-saving efforts. RoadFlair Pro has been upgraded to minimize costs while maximizing efficacy, safety, and functionality. And the best part - RoadFlair Pro offers a streamlined design, so it maintains an attractive aesthetic on city streets. These streetlights not only look good, they also offer excellent performance. Futureproof technology combines with high efficacy (160 lm/W and 200 lm/W), innovative design, and smart connectivity in a light that makes your street look brighter and better

Product data

General Information		Operating and Electrical	
Driver included	Yes	Input Voltage	220-240 V
Value ladder	Specification	Line Frequency	50 or 60 Hz
CE mark	CE mark	Power Consumption	150 W
		Power Factor (Fraction)	0.95
		Connection	Connection unit 5-pole
		Cable	-
Light Technical		Temperature	
Luminous Flux	24,200 lm	Ambient temperature range	-40 to +50 °C
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	160 lm/W		
Color rendering index (CRI)	>70		
Light source color	740 neutral white		
Optical cover type	Clear dome		
		Controls and Dimming	
		Dimmable	Yes

Initial Performance (IEC Compliant)

Control interface	depends on driver (1-10V, DALI...)
-------------------	------------------------------------

Mechanical and Housing

Housing Material	Aluminum die cast
Optical cover material	Polycarbonate
Housing Color	Grey
Overall length	578 mm
Overall width	189 mm
Overall height	129 mm
Dimensions (Height x Width x Depth)	129 x 189 x 578 mm

Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Protection class IEC	Safety class I


© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, December 13 - data subject to change

Luminous flux tolerance +/-7%

Power consumption tolerance +/-10%

Dimensional drawing

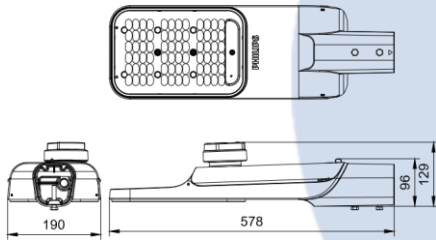

Product Data

Order product name	BRP593 LED242/NW 150W DM PSA P7 GM
Full product name	BRP593 LED242/NW 150W DM PSA P7 GM
Order code	911401658208
Material Nr. (12NC)	911401658208
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1

