

Câble anti - feu Energie CR1/C1 - 4x1,5



Halogen-free 0.6/1kV rigid cables, fire retardant, with copper core, green sheath. ALSECURE® Cca cables are designed for private or public residential buildings and industry, for control and power circuits.

DESCRIPTION

Application

ALSECURE® Cca cables are designed to be used in private residences or public areas, in all premises open to the public and industries, for power and control circuits.

ALSECURE® Cca cables are **fire retardant**, low smoke and **halogen free**. In the event of fire, emitted gases are non corrosive and have a very low toxicity.

CHARACTERISTICS

Construction characteristics

Conductor flexibility	Solid class 1
Conductor material	Bare copper
Insulation	XLPE (Cross-linked Polyethylene)
Outer sheath	Halogen free polyolefin
Sheath colour	Green
Halogen free	IEC 60754-1
Conductor shape	-
Higher heating value	- MJ/km
With Green/Yellow core	Yes
With smaller neutral conductor	No

Dimensional characteristics


Neutral conductor section (when smaller)	- mm ²
Minimum outer diameter	9.8 mm
Maximum outer diameter	12.0 mm
Number of cores	4
Conductor cross-section	1.5 mm ²

Electrical characteristics

Rated Voltage U ₀ /U (U _m)	0.6/ 1 (1.2) kV
---	-----------------

Usage characteristics

Operating temperature, range	-20 - 60 °C
Gases corrosivity	IEC 60754-2
Smoke density	EN 50399
Flame retardant	NFC 32070 C2, IEC 60332-1-2
Fire retardant	NFC 32070 C1, IEC 60332-3-24
Water proof	Good
U.V resistance	AN2
Max. conductor temperature in service	90 °C

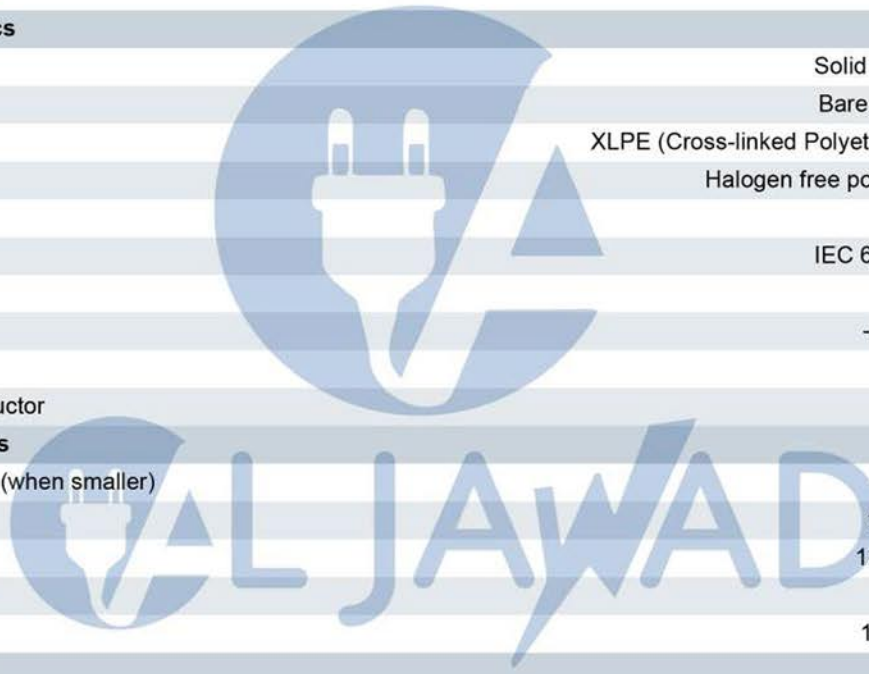

Marking



Halogen free
IEC 60754-1



Conductor flexibility
Stranded class 2



Rated Voltage U₀/U
(U_m)
0.6/1 (1.2) kV



Cable flexibility
Rigid



Fire resistant
CR1, NFC 32-070



Fire retardant
C1, NFC 32-070



Smoke density
IEC 61034



Gases toxicity
Low