

Essential Smartbright TLED Waterproof: WT069C

Safe & Reliable



Unique selling point

- **PC Cover and housing material**
- **Stainless Steel Clips**
- **IP65, IK08**
- **Glow wire rating: 850C**
- **-20C - +35C ***


** Depends on TLED*

PHILIPS




Essential Smartbright TLED Waterproof: WT069C Spec sheet

	A Brand Bare TLED Waterproof
Safety Class (driver+system)	Class II
Housing material	PC
Cover material (Diffuser)	PC
Clips	Stainless Steel
Cable Gland	M20 (same as Coreline Waterproof)
IPxx	IP65
IKxx	IK08
Ball-proof	follow IEC
Glow wire rating	850C
fire-rated	follow IEC
Mounting	Via SS Brackets
Power connection	Through connector (integrated fuse)
Color(s) (and RAL code)	Light Grey (same as coreline waterproof)
Size (LxWxH) + considerations	Supplier provided
Weight (Kg)	Supplier provided
Packaging concept	1-in-1 + cartonbox
Temperature Range (depending on TLED)	-20C - +35C (housing only).
	(possible to have 10% lower lamp life at 35C for 2x4ft lamps)
Luminaire Service class	B
RoHS/REACH	Yes

Mounting distance

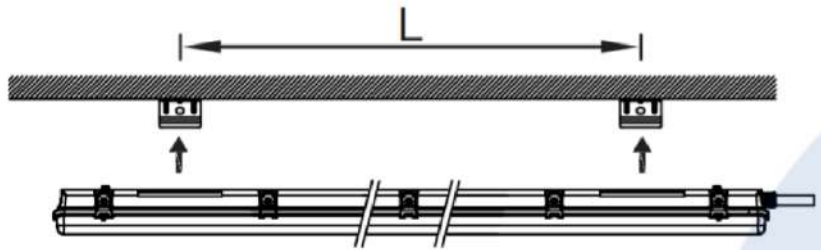

Type	L600	L1200
L	255-405mm	730-950mm

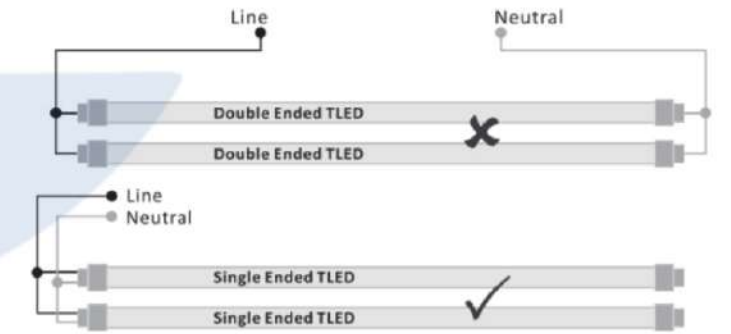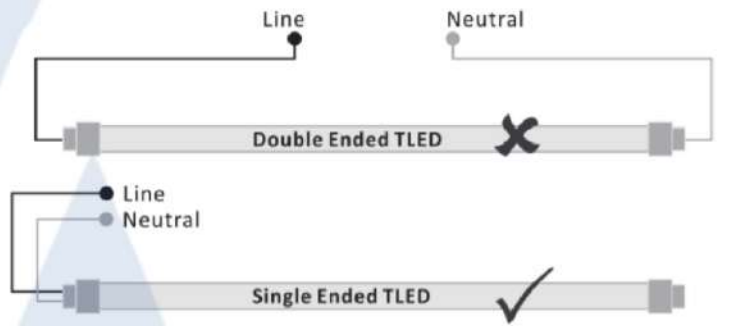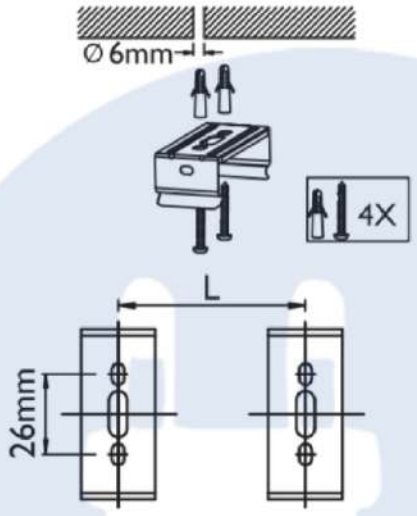

12NC	Description
911401805881	WT069C DE 2XTLED Bare L1200 GC