

Essential Smartbright TLED Waterproof: WT069C

Safe & Reliable



Unique selling point

- **PC Cover and housing material**
- **Stainless Steel Clips**
- **IP65, IK08**
- **Glow wire rating: 850C**
- **-20C - +35C ***


** Depends on TLED*

PHILIPS




Essential Smartbright TLED Waterproof: WT069C Spec sheet

| | A Brand Bare TLED Waterproof |
|---------------------------------------|---|
| Safety Class (driver+system) | Class II |
| Housing material | PC |
| Cover material (Diffuser) | PC |
| Clips | Stainless Steel |
| Cable Gland | M20 (same as Coreline Waterproof) |
| IPxx | IP65 |
| IKxx | IK08 |
| Ball-proof | follow IEC |
| Glow wire rating | 850C |
| fire-rated | follow IEC |
| Mounting | Via SS Brackets |
| Power connection | Through connector (integrated fuse) |
| Color(s) (and RAL code) | Light Grey (same as coreline waterproof) |
| Size (LxWxH) + considerations | Supplier provided |
| Weight (Kg) | Supplier provided |
| Packaging concept | 1-in-1 + cartonbox |
| Temperature Range (depending on TLED) | -20C - +35C (housing only). |
| | (possible to have 10% lower lamp life at 35C for 2x4ft lamps) |
| Luminaire Service class | B |
| RoHS/REACH | Yes |

Mounting distance

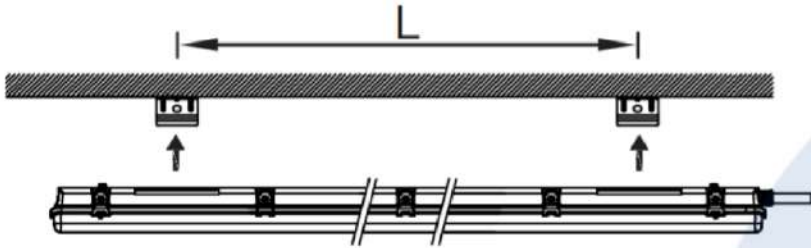

| | | |
|------|-----------|-----------|
| Type | L600 | L1200 |
| L | 255-405mm | 730-950mm |

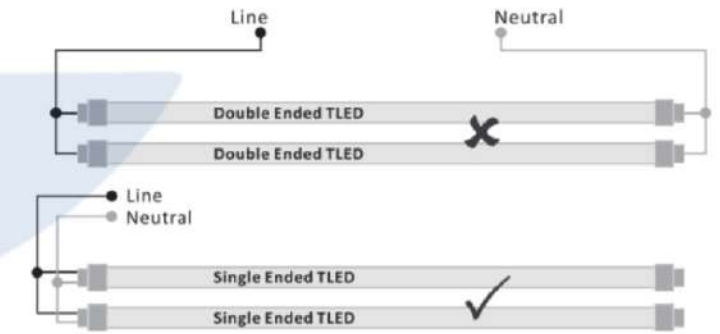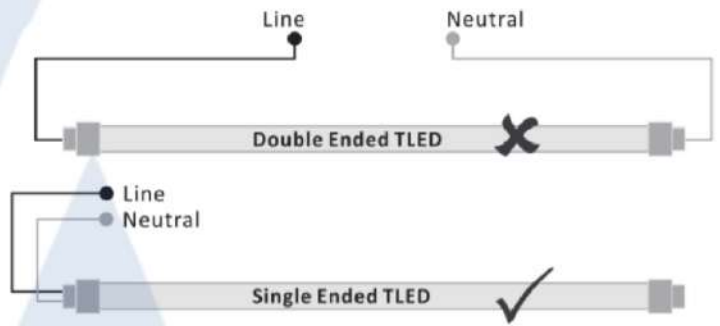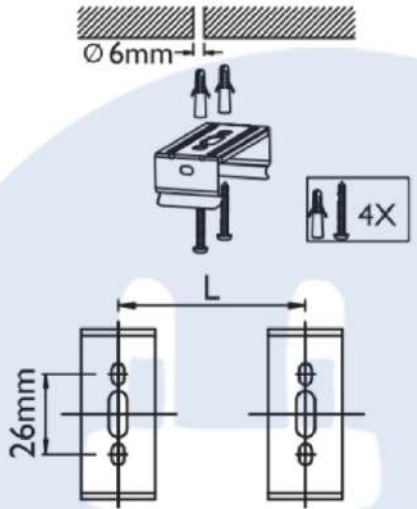

| 12NC | Description |
|--------------|-------------------------------|
| 911401812285 | WT069C DE 2XTLED Bare L600 GM |