



GreenPerform Highbay G4

BY698P LED265/CW PSD WB GC G2

- 865 cool daylight - Power supply unit (ON/OFF) - Beam angle 90°

Following the success of GreenPerform Highbay families, GreenPerform Highbay G4 is continuously exploring a better price & performance balance. The product family offers wide product ranges, competitive enough SPEC with long term quality & reliability, covering most of the potential industrial applications.

Product data

General Information		Operating and Electrical	
Light source replaceable	No	Input Voltage	220 to 240 V
Number of gear units	2 units	Line Frequency	50 or 60 Hz
Driver included	Yes	Input Frequency	50 or 60 Hz
Light source engine type	LED	Initial CLO power consumption	207 W
		Average CLO power consumption	207 W
		Inrush current	60 A
		Inrush time	0.6 ms
		Power Consumption	207 W
		Power Factor (Fraction)	0.95
		Connection	-
		Cable	Cable 0.3 m without plug
		Number of products on MCB of 16 A type B 8	
Light Technical			
Luminous Flux	26,500 lumen		
Correlated Color Temperature (Nom)	6500 K		
Luminous Efficacy (rated) (Nom)	128 lm/W		
Color rendering index (CRI)	>80		
Beam angle of light source	90 degree(s)		
Light source color	865 cool daylight		
Optic type	Beam angle 90°		
Optical cover/lens type	Without cover		
Luminaire light beam spread	90°		

Temperature

Ambient temperature range	-30 to +45 °C
---------------------------	---------------

Datasheet, 2023, June 30

data subject to change

GreenPerform Highbay G4

Warranty period	3 years
EU RoHS compliant	Yes

Controls and Dimming

Initial Performance

Dimmable	Yes
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	DALI
Constant light output	Programmable

(IEC Compliant)

Over Time


Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	DALI
Constant light output	Programmable

Performance (IEC Compliant)

Mechanical and Housing

Housing Material	Aluminum die cast
Reflector material	Aluminum
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Aluminum
Housing Color	Gray
Optical cover/lens finish	Clear
Overall height	335 mm
Overall diameter	416 mm

Approval and Application




Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Protection class IEC	Safety class I
Glow-wire test	Temperature 750 °C, duration 5 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	CE mark
ENEC mark	-

Dimensional drawing

Driver failure rate at 5000 h	0.1 %	Luminous flux tolerance	+/-10%
Median useful life L70B50	50,000 hour(s)	Power consumption tolerance	+/-10%

Application Conditions

Maximum dim level	5%
Suitable for random switching	No

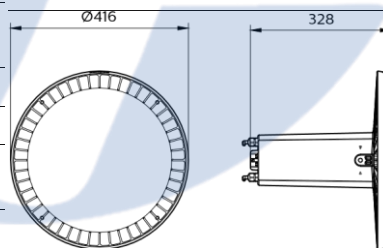

Product Data

Full product code	911401533761
Order product name	BY698P LED265/CW PSD WB GC G2
Order code	911401533761
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material number (12NC)	911401533761
Full product name	BY698P LED265/CW PSD WB GC G2

GreenPerform Highbay G4

not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, June 30 - data subject to change

