## **Product data sheet**

Specifications



## IP55 PLAIN DOOR W300

LVS08523

Main	
Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Door
Range compatibility	PrismaSeT (PrismaSeT P) duct
Provided equipment	door other keylock and insert to be ordered separately 4 hinge black handle with lock for 405 key polyurethane joint
Enclosure mounting	Floor-standing
Type of door	Plain
IP degree of protection  Complementary	IP55
Installation description	Duct - width 300 mm
Door opening side	Reversible
Number of locks	3
Door opening angle	120 °
Number of vertical modules [50 mm]	36
Enclosure material	Treated sheet steel
Quantity per set	Set of 1
Height	2000 mm
Width	300 mm
Depth	30 mm


14.76 kg

**Product weight** 

Surface finish	Matt Textured
Colour	White (RAL 9003)
Environment	
IK degree of protection	IK10 conforming to EN/IEC 62262
Standards	IEC 61439-2 IEC 61439-1
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.0 cm
Package 1 Width	36.0 cm
Package 1 Length	197.0 cm
Package 1 Weight	15.03 kg
Unit Type of Package 2	P2M
Number of Units in Package 2	30
Package 2 Height	83.0 cm
Package 2 Width	120.0 cm
Package 2 Length	202.0 cm
Package 2 Weight	477.0 kg
Offer Sustainability	
Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration  Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
<b>Environmental Disclosure</b>	Product Environmental Profile
<b>Product data shee</b>	t LVS08523
Technical Illustration	

**Dimensions** 

Jun 23, 2023 Life Is On Schneider Delectric 3

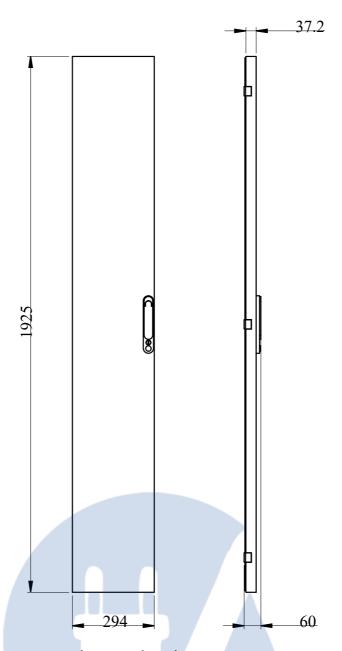

- All dimensions are approximate and are in mm.Also see technical documentation.

## Recommended replacement(s)