Product data sheet

Specifications





Side panel, PrismaSeT P, for enclosure, D600mm, IP55, set of 2 (left/right), white, RAL 9003

LVS08765

		=	
M	а	ı	n

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Side panel
Range compatibility	PrismaSeT (PrismaSeT P) enclosure
Device application	Low voltage electrical distribution
Enclosure type	Metal enclosure
	Indoor enclosure
Installation description	Cubicle - width 400 mm, depth 600 mm
	Cubicle - width 650 mm, depth 600 mm
	Cubicle - width 800 mm, depth 600 mm
Kit composition	2 side panel quarter-
	turn fasteners
Standards	IEC 61439-1 for enclosure
	IEC 61439-2 for enclosure
Product certifications	ASTA

Complementary

·	
Material	Treated sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt
	Textured
Colour	White (RAL 9003)
Width	600 mm
Height	2000 mm
Product weight	34.2 kg


Quantity per set	Set of 2
Environment	
IP degree of protection	IP55 for enclosure
IK degree of protection	IK10
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.5 cm
Package 1 Width	68.0 cm
Package 1 Length	206.0 cm
Package 1 Weight	35.35 kg
Unit Type of Package 2	PAL
Number of Units in Package 2	10
Package 2 Height	96 cm
Package 2 Width	120 cm
Package 2 Length	206 cm
Package 2 Weight	375 kg
Offer Sustainability	
Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
PVC free	Yes
Product data sheet	LVS08765

Product data sheet

LVS08765

Technical Illustration

Dimensions

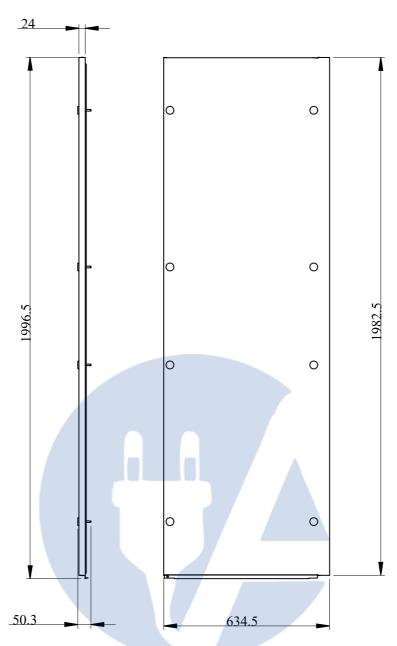

- All dimensions are approximate and are in mm.Also see technical documentation.

Recommended replacement(s)