



Product data sheet


Specifications

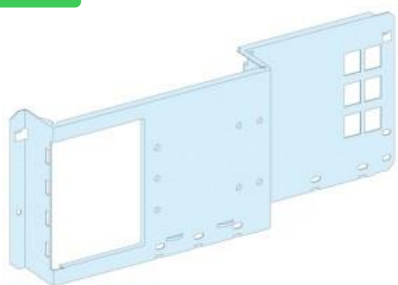

Mounting plate, PrismaSeT G, for NSX/CVS/INS 250A, horizontal fixed, toggle, 5M, W600mm

LVS03030

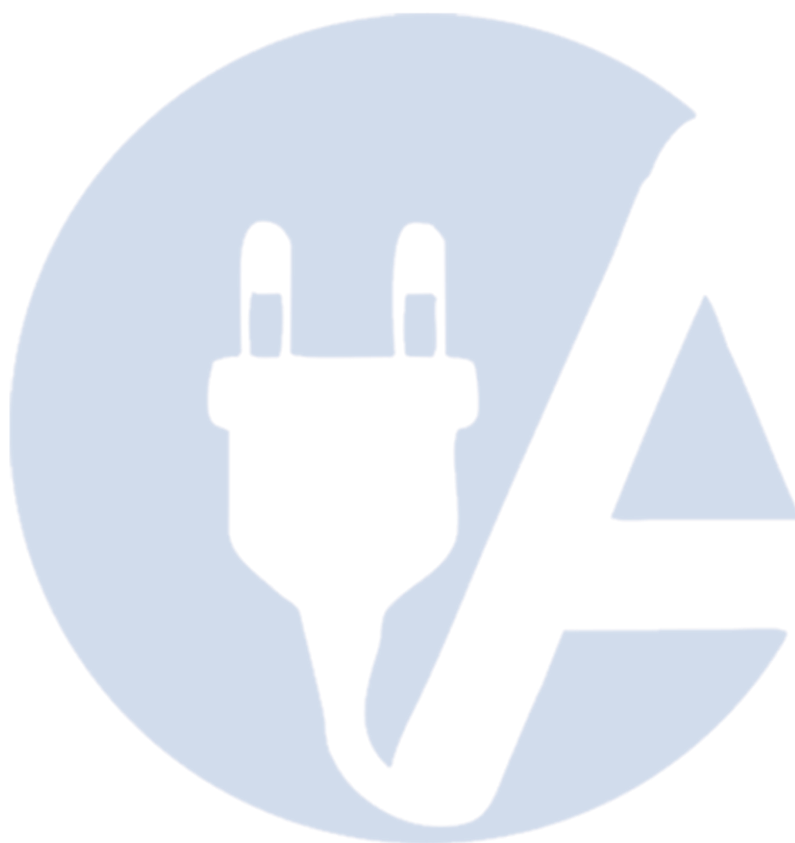

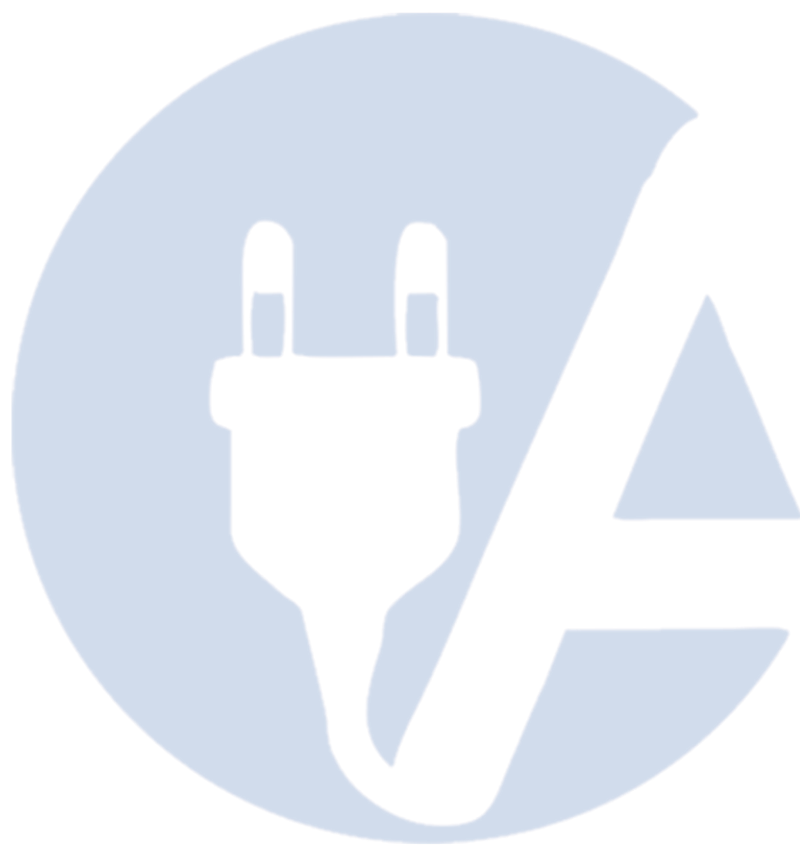

Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT (PrismaSeT G) enclosure PrismaSeT (PrismaSeT Pack 250) enclosure
Installation description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Floor-standing enclosure - width 850 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm Pack enclosure - width 600 mm
Installed device	EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle - horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed INS250 - control: direct front rotary handle - horizontal installation ComPact: fixed INV100 - control: direct front rotary handle - horizontal installation ComPact: fixed INV250 - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed INV160 - control: direct front rotary handle - horizontal installation ComPact: fixed INV200 - control: direct front rotary handle - horizontal installation
Poles description	1 x 3P: fixed CVS100...160 horizontal installation 1 x 4P: fixed CVS100...160 horizontal installation 1 x 3P: fixed CVS250 horizontal installation 1 x 4P: fixed CVS250 horizontal installation 1 x 3P: fixed INS250 horizontal installation 1 x 4P: fixed INS250 horizontal installation 1 x 3P: fixed INV100 horizontal installation 1 x 4P: fixed INV100 horizontal installation 1 x 3P: fixed INV250 horizontal installation 1 x 4P: fixed INV250 horizontal installation 1 x 3P: fixed NSX100...160 horizontal installation 1 x 4P: fixed NSX100...160 horizontal installation 1 x 3P: fixed NSX250 horizontal installation 1 x 4P: fixed NSX250 horizontal installation 1 x 3P: fixed INV160 horizontal installation 1 x 4P: fixed INV160 horizontal installation 1 x 3P: fixed INV200 horizontal installation 1 x 4P: fixed INV200 horizontal installation
Condition of using cable tie	Need additional plate (2M high) when installation of device is in horizontal
Number of vertical modules [50 mm]	5 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widfloor-standing enclosure (cable coming from top or bottom of enclosure) 5 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widwall-mounted enclosure (cable coming from top or bottom of enclosure) 4 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widfloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widwall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 850 mm Widfloor-standing enclosure (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)

4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure)

4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 600 + 300 mm Widefloorstanding enclosure + duct (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 600 + 300 mm Widewallmounted enclosure + duct (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)

4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)

6 module(s): NSX250 without earth leakage protection , connection block in 600 mm WidePackenclosure (cable coming from top or bottom of enclosure)

6 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm WidePack enclosure (cable coming from top or bottom of enclosure)

Standards	IEC 61439-2
Product certifications	ASTA
Complementary	
Cable entry	<p>Cut-out plates 0.33 mm top 92 mm</p> <p>Cut-out plates 0.31 mm top 42 mm</p> <p>Cut-out plates 0.31 mm bottom 42 mm</p> <p>Cut-out plates 0.35 mm top or bottom 142 mm</p>
Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	<p>Textured</p> <p>Matt</p>
Colour	White (RAL 9003)
Width	600 mm
Height	200 mm
Product weight	1.16 kg
Functional unit	<p>600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed toggle horizontal 3P 1 direct with long terminal shield 5 0.33 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 without fixed toggle horizontal 3P 1 direct with long terminal shield 5 0.33 mm</p> <p>600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS100...160 without fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm</p> <p>600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS100...160 without fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm</p> <p>600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed toggle horizontal 3P 1 direct with long terminal shield 5 0.31 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 without fixed toggle horizontal 3P 1 direct with long terminal shield 5 0.31 mm</p> <p>850 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm</p> <p>600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed toggle horizontal 4P 1 direct with long terminal shield 5 0.33 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 without fixed toggle horizontal 4P 1 direct with long terminal shield 5 0.33 mm</p>

600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 5 0.33 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 5 0.33 mm

600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.33 mm

600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.33 mm

600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.31 mm

600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.31 mm

850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.33 mm

850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.31 mm

850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm

600 mm Prisma Pack 250 Pack enclosure ComPact NSX250 without fixed toggle horizontal 3P 1 connection block 6 0.35 mm

600 mm Prisma Pack 250 Pack enclosure ComPact NSX250 without fixed toggle horizontal 3P 1 direct with long terminal shield 6 0.35 mm

600 mm Prisma Pack 250 Pack enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 6 0.35 mm

600 mm Prisma Pack 250 Pack enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 6 0.35 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.5 cm
Package 1 Width	21.0 cm
Package 1 Length	47.6 cm
Package 1 Weight	1.154 kg
Unit Type of Package 2	CAR
Number of Units in Package 2	5
Package 2 Height	22.5 cm
Package 2 Width	32.0 cm
Package 2 Length	50.0 cm
Package 2 Weight	6.192 kg
Unit Type of Package 3	P12
Number of Units in Package 3	70
Package 3 Height	77.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	98.0 kg

Offer Sustainability


Sustainable offer status Green Premium product

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
PVC free	Yes
Halogen content performance	Halogen free plastic parts product

Product data sheet **LVS03030**

Technical Illustration

Dimensions

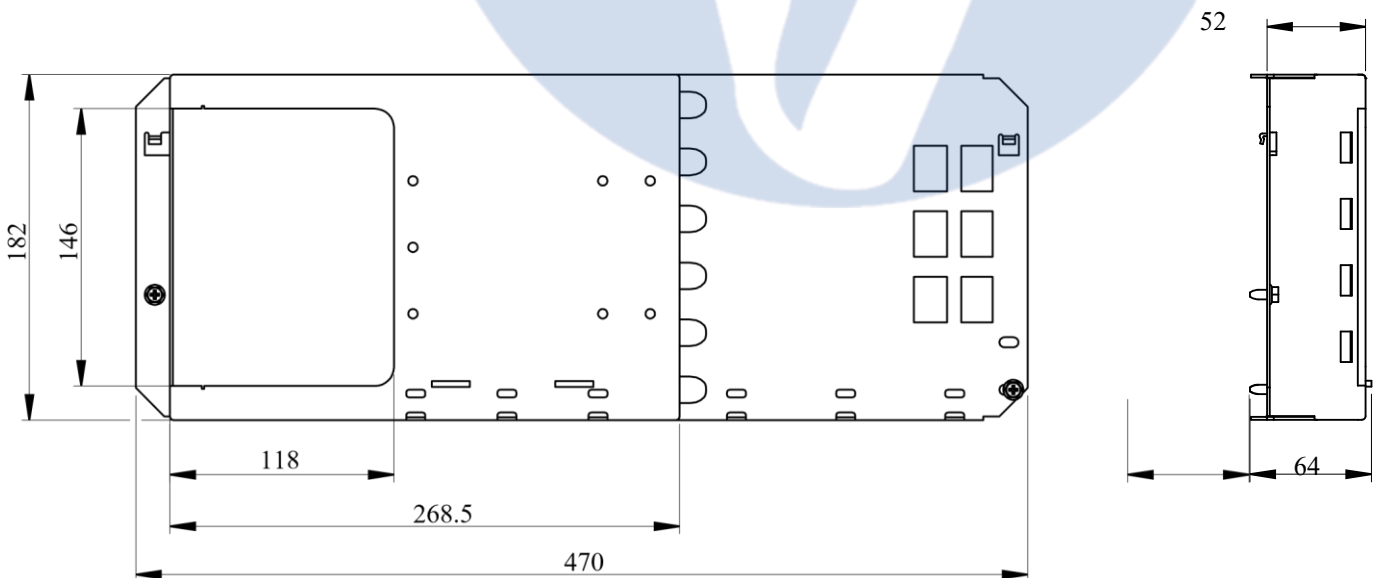

- All dimensions are approximate and are in mm.
- Also see technical documentation.

Recommended replacement(s)

