



Product data sheet

Specifications

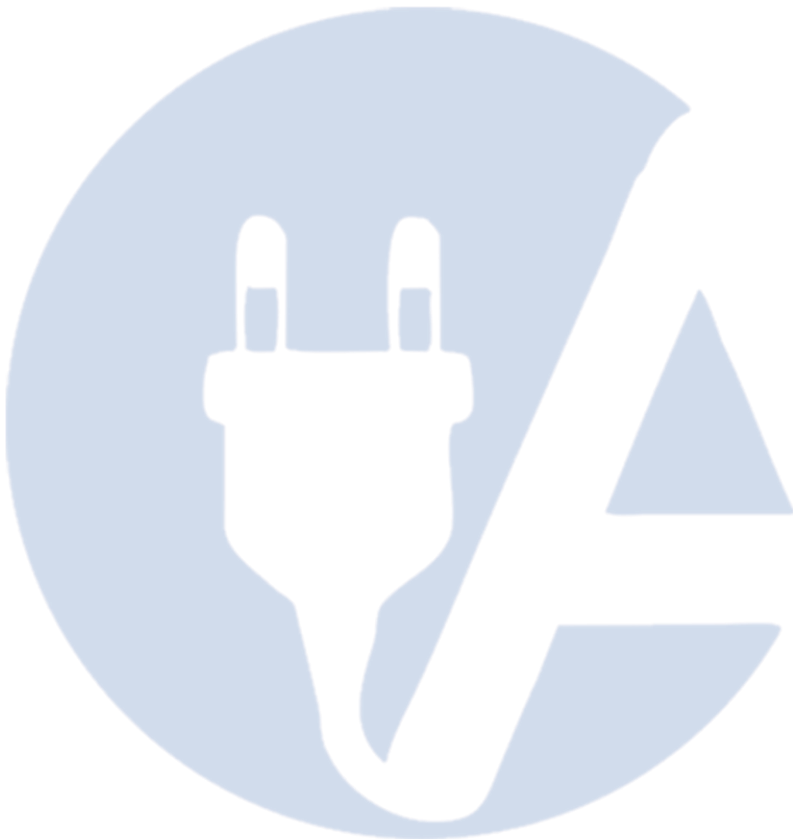

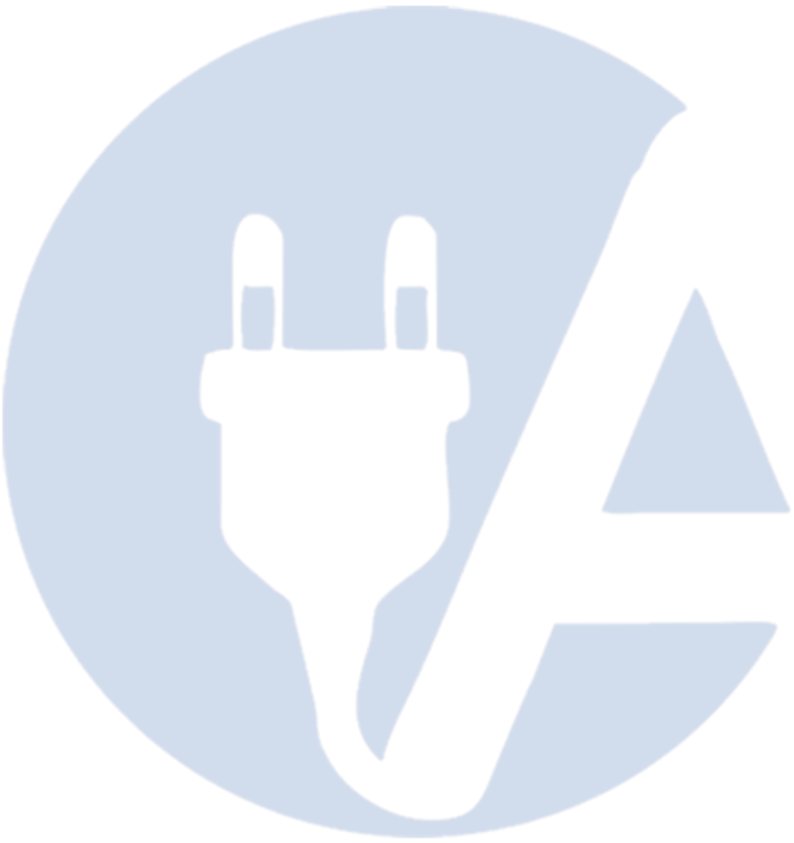

Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT (PrismaSeT G) enclosure
Installation description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Installed device	<p>EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle - vertical installation</p> <p>EasyPact: fixed CVS250 without earth leakage protection - control: toggle - vertical installation</p> <p>ComPact: fixed INS250 - control: direct front rotary handle - vertical installation</p> <p>ComPact: fixed INV100 - control: direct front rotary handle - vertical installation</p> <p>ComPact: fixed INV160 - control: direct front rotary handle - vertical installation</p> <p>ComPact: fixed INV200 - control: direct front rotary handle - vertical installation</p> <p>ComPact: fixed INV250 - control: direct front rotary handle - vertical installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: toggle - vertical installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: toggle - vertical installation</p> <p>EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle - vertical installation</p> <p>EasyPact: fixed CVS250 with earth leakage protection - control: toggle - vertical installation</p> <p>ComPact: fixed NSX100...160 with earth leakage protection - control: toggle - vertical installation</p> <p>ComPact: fixed NSX250 with earth leakage protection - control: toggle - vertical installation</p>
Poles description	<p>1 x 3P: fixed INS250 vertical installation</p> <p>1 x 4P: fixed INS250 vertical installation</p> <p>1 x 3P: fixed INV250 vertical installation</p> <p>1 x 4P: fixed INV250 vertical installation</p> <p>4 x 3P: fixed CVS100...160 vertical installation</p> <p>3 x 4P: fixed CVS100...160 vertical installation</p> <p>4 x 3P: fixed CVS250 vertical installation</p> <p>3 x 4P: fixed CVS250 vertical installation</p> <p>1 x 3P: fixed INV100 vertical installation</p> <p>1 x 4P: fixed INV100 vertical installation</p> <p>1 x 3P: fixed INV160 vertical installation</p> <p>1 x 4P: fixed INV160 vertical installation</p> <p>1 x 3P: fixed INV200 vertical installation</p> <p>1 x 4P: fixed INV200 vertical installation</p> <p>4 x 3P: fixed NSX100...160 vertical installation</p> <p>3 x 4P: fixed NSX100...160 vertical installation</p> <p>4 x 3P: fixed NSX250 vertical installation</p> <p>3 x 4P: fixed NSX250 vertical installation</p>
Condition of using cable tie	Need additional plate (1M high) when installation of device is in vertical
Number of vertical modules [50	<p>8 module(s): INS250, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INS250, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV250, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>8 module(s): INV250, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>9 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 mm</p>

Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 11 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm
 Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 11 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm
 Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 8 module(s): INV100, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 8 module(s): INV100, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 8 module(s): INV160, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 8 module(s): INV160, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 8 module(s): INV200, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 8 module(s): INV200, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 9 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 9 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 11 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 11 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 10 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 10 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 13 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 13 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 10 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 10 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
 13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
 13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)

Standards IEC 61439-2

Product certifications ASTA

Complementary

Cable entry
 Cut-out plates 0.36 mm top or bottom 167 mm
 Cut-out plates 0.31 mm top or bottom 267 mm
 Cut-out plates 0.34 mm top or bottom 117 mm

Material Sheet steel

Protective treatment Electrophoresis treatment and hot-polymerised polyester epoxy powder

Surface finish
 Matt
 Textured

Colour White (RAL 9003)

Width 600 mm

Height 150 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle vertical 3P 4 direct with long terminal shield 11 0.31 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed toggle vertical 3P 4 direct with long terminal shield 11 0.31 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle vertical 4P 3 direct with long terminal shield 11 0.31 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed toggle vertical 4P 3 direct with long terminal shield 11 0.31 mm

600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 with fixed toggle vertical 3P 4 direct with long terminal shield 10 0.36 mm

600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 with fixed toggle vertical 3P 4 direct with long terminal shield 10 0.36 mm

600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 with fixed toggle vertical 4P 3 direct with long terminal shield 10 0.36 mm

600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 with fixed toggle vertical 4P 3 direct with long terminal shield 10 0.36 mm

600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed toggle vertical 3P 4 direct with long terminal shield 13 0.31 mm

600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 with fixed toggle vertical 3P 4 direct with long terminal shield 13 0.31 mm

600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed toggle vertical 4P 3 direct with long terminal shield 13 0.31 mm

600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 with fixed toggle vertical 4P 3 direct with long terminal shield 13 0.31 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 with fixed toggle vertical 3P 4 direct with long terminal shield 10 0.36 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX100...160 with fixed toggle vertical 3P 4 direct with long terminal shield 10 0.36 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 with fixed toggle vertical 4P 3 direct with long terminal shield 10 0.36 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX100...160 with fixed toggle vertical 4P 3 direct with long terminal shield 10 0.36 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 with fixed toggle vertical 3P 4 direct with long terminal shield 13 0.31 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 with fixed toggle vertical 3P 4 direct with long terminal shield 13 0.31 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 with fixed toggle vertical 4P 3 direct with long terminal shield 13 0.31 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 with fixed toggle vertical 4P 3 direct with long terminal shield 13 0.31 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.8 cm
Package 1 Width	15.2 cm
Jun 30, 2023	3
<hr/>	
Package 1 Length	47 cm
Package 1 Weight	1.008 kg
<hr/>	
Unit Type of Package 2	S04
Number of Units in Package 2	10
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm

Package 2 Weight 10.855 kg

Offer Sustainability

Sustainable offer status Green Premium product

REACH Regulation [REACH Declaration](#)

REACH free of SVHC Yes

EU RoHS Directive Pro-active compliance (Product out of EU RoHS legal scope)
[EU RoHS Declaration](#)

Toxic heavy metal free Yes

Mercury free Yes


China RoHS Regulation [China RoHS declaration](#)
Pro-active China RoHS declaration (out of China RoHS legal scope)

RoHS exemption information [Yes](#)


Environmental Disclosure [Product Environmental Profile](#)

PVC free Yes

Halogen content performance Halogen free plastic parts product

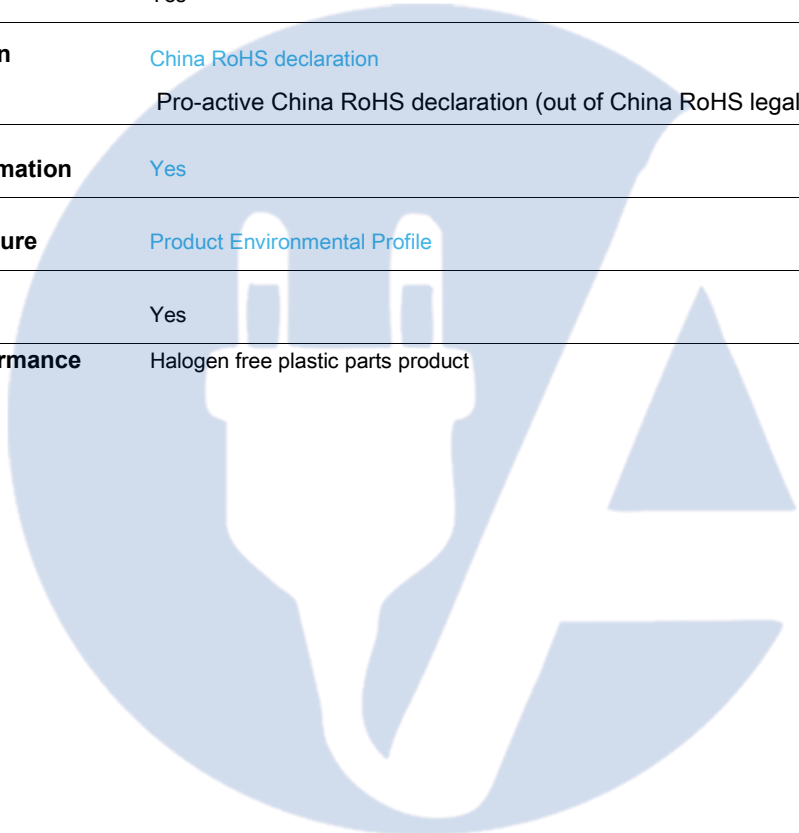

Dimensions

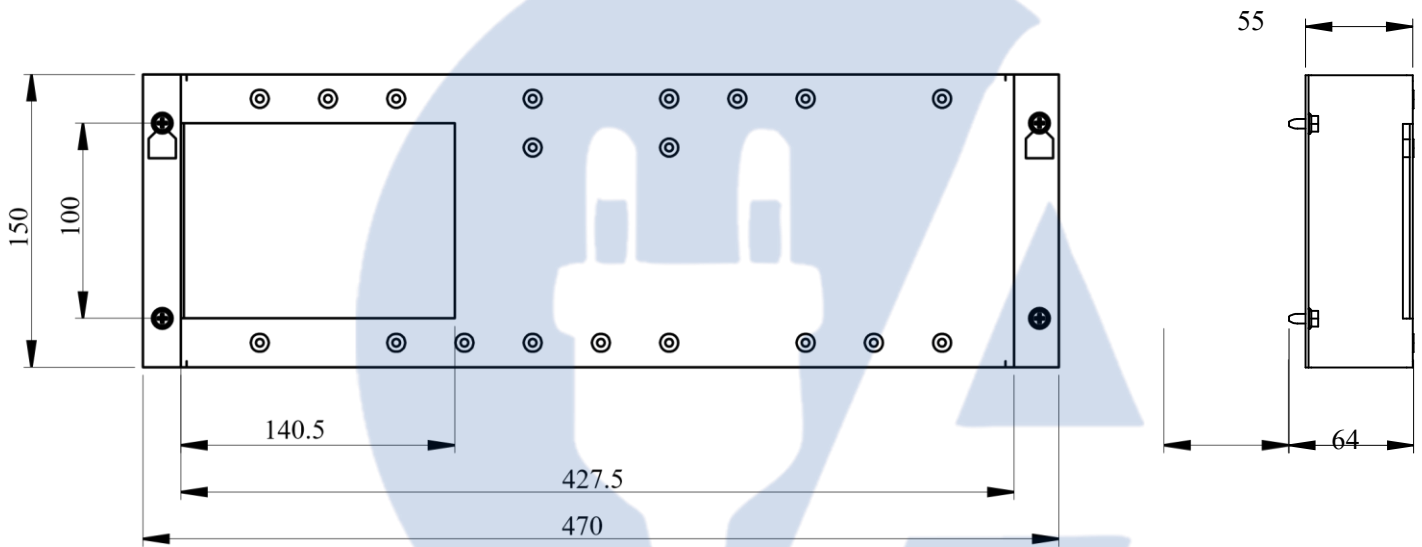

- All dimensions are approximate and are in mm.
- Also see technical documentation.

Recommended replacement(s)

