



SmartBright LED Batten G2

BN012C LED20/WW L1200 G2

- Power supply unit - Wide beam - Polycarbonate linear - 140°

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. This new batten range of LED products can be used to replace traditional battens with fluorescent lamps. The process of selecting, installing and maintaining is so easy – it's a simple switch

Product data

General Information

Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Light source engine type	LED

Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	20 W
Power Factor (Fraction)	0.8
Connection	Flying leads/wires
Cable	Cable without plug 2-pole
Number of products on MCB of 16 A type B	10

Light Technical

Luminous Flux	2,000 lumen
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	100 lm/W
Color rendering index (CRI)	>80
Light source color	Warm white
Optic type	Wide beam
Optical cover/lens type	Polycarbonate linear
Luminaire light beam spread	140°

Temperature

Ambient temperature range	+20 to +35 °C
---------------------------	---------------

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-

SmartBright LED Batten G2

Dimensional drawing

© 2023 Signify Holding All rights reserved.

Signify does not give any representation or

Constant light output	No
Mechanical and Housing	
Housing Material	Polyamide
Optic material	Polycarbonate
Optical cover/lens material	Polyamide
Fixation material	Steel
Housing Color	White
Optical cover/lens finish	Clear
Overall length	1,200 mm
Overall width	30 mm
Overall height	37 mm
Dimensions (Height x Width x Depth)	37 x 30 x 1200 mm

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	SDCM<6
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Median useful life L70B50	25,000 hour(s)
---------------------------	----------------

Application Conditions


Maximum dim level	Not applicable
-------------------	----------------

Product Data

Full product code	911401806697
Order product name	BN012C LED20/WW L1200 G2
Order code	911401806697
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material number (12NC)	911401806697
Full product name	BN012C LED20/WW L1200 G2
EAN/UPC - Case	8710163308326

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK00 [No protection]
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 5 s
CE mark	CE mark
Warranty period	3 years
EU RoHS compliant	Yes

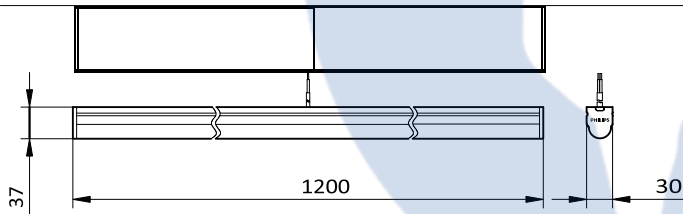

warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify, Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 22 - data subject to change

