

Spot LED 2 Encastré RS100B 850 - 3W




Essential SmartBright RS100B LED Spot Luminaires

RS100B Technical Specs

Type	LED2	LED5	LED8	LED18	LED30
lumen output	200lm	500lm	800lm	1800lm	3000lm
Cut-out (mm)	Ø55	Ø75	Ø90	Ø120	Ø150
Fitting's height (mm)	41	42	48	78	92
SDCM			<5		
CRI			>80		
CCT			3000K / 4000K / 5000K		
Beam			MB (24 degree) / (WB 36 degree)		
Voltage			220-240V~ 50/60Hz; 110-240V~50/60Hz		
Power cons.	3w	6w	9w	20w	27w
Efficacy			Up to 80 lm/w		
PF			Up to 0.5		
LED driver			Fixed output (Integrated with luminaire)		
Connection			150mm flex		
Materials and finishing			Plastic white housing		
Lifetime		15,000 hours (L70B50 @ 25°C)		25,000 hours (L70B50@25°C)	
Working Temp.			-20°C < Ta < +40°C		
Electrical Class		Class II		Class I	
IP/IK rating			IP20/IK03		
Certifications			CB,CE, CCC		
Modular approach	Simple 'Click and Twist' approach to install any single fitting onto the accessory board to become modular offer. This is flexible and save many SKUs in the warehouse				

Essential SmartBright RS100B product description

RS100B LED2 850 3W 220 . 240V - D55 - WB

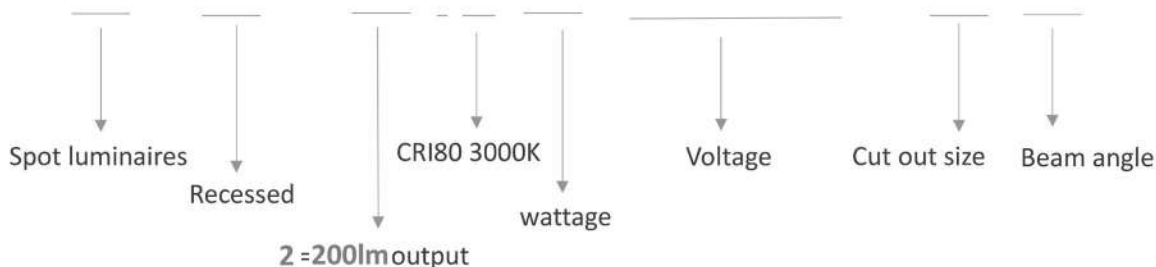

Site web : www.aljawad.ci | Email : aljawad@aljawad.ci

(+225) 27 21 25 35 27